

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/013969 A1

(51) International Patent Classification⁷: **H03L 7/18,**
G01S 7/40

Hertfordshire SG1 2DA (GB). **JUSTIN, Peter** [GB/GB];
MBAD UK Limited, Six Hills Way, Stevenage, Hertford-
shire SG1 2DA (GB).

(21) International Application Number:
PCT/GB2003/003221

(74) Agent: **BAE Systems plc**; Group IP Department, Lan-
caster House, P.O. Box 87, Farnborough Aerospace Centre,
Farnborough, Hampshire GU14 6YU (GB).

(22) International Filing Date: 29 July 2003 (29.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0218166.7 6 August 2002 (06.08.2002) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **MBDA
UK LIMITED** [GB/GB]; Six Hills Way, Stevenage, Hert-
fordshire SG1 2DA (GB).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **KLEIN, Robert**
[GB/GB]; MBAD UK Limited, Six Hills Way, Stevenage,

[Continued on next page]

(54) Title: WAVEFORM LINEARISER

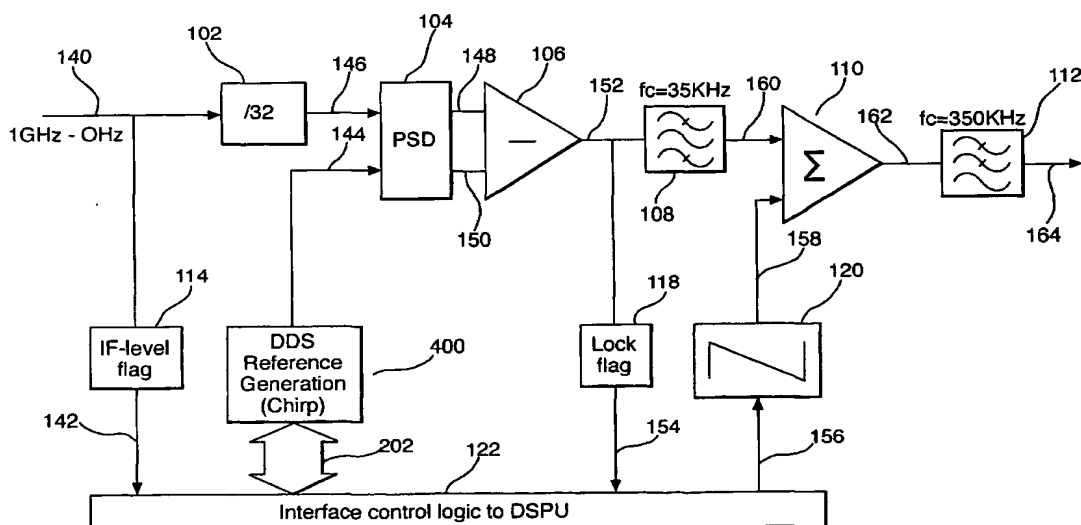

(57) Abstract: An improved apparatus and method of generating swept frequency waveforms in the field of digital lineariser technology, using a phase-locked loop frequency synthesiser, is provided. Preferably, a ramp generator (120) is used to apply a modulation signal to the frequency control input of a voltage controlled oscillator via a summer component (110). A direct digital synthesis (DDS) reference component (400) is used to controllably produce a progressive shift in threshold crossing points of the signal (on line 144) such as to compensate for the ramp signals generated by the generator (120) which is compared with the signal (on line 146) from the reference frequency source (line 140). Advantageously, the proposed apparatus/method finds utility in various FM CW-based radar applications.



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ABSTRACT OF THE DISCLOSURE

WAVEFORM LINEARISER

An improved apparatus and method of generating swept frequency waveforms in the field of digital lineariser technology, using a phase-locked loop
5 frequency synthesiser, is provided.

Preferably, a ramp generator 120 is used to apply a modulation signal to the frequency control input of a voltage controlled oscillator via a summer component 110. A direct digital synthesis (DDS) reference component 400 is used to controllably produce a progressive shift in threshold crossing points of
10 the signal (on line 144) such as to compensate for the ramp signals generated by the generator 120 which is compared with the signal (on line 146) from the reference frequency source (line 140).

Advantageously, the proposed apparatus/method finds utility in various FM CW-based radar applications.

15 (Figure 3)